



AXL-3000 Air Mover

Best Air Mover in the Industry ★★★★★

High-velocity, optimally directed airflow specifically designed to dry large areas of wet surfaces. Can be easily mounted to existing fan stands to provide downward airflow for center-of-the-room drying or angles flow for walls and ceilings. The Protege AXL-3000 offers class-leading drying performance, quieter operation and all the features professional restorers want.



Specifications

| | |
|-------------------------|--|
| Drive Motor | 1/3 Horse Power |
| Volts / Cycle | 115V / 60 HZ |
| Power | 2.5 Amps |
| Rated Air Flow | 3,600 CFM |
| Speeds | Variable Speed Control |
| RPM | 400-1,600 |
| Cord Length | 20 feet |
| Housing | Injection Molded ABS |
| Stackable | Yes |
| Dual Thermal Protection | Yes |
| Inlet & Exhaust Grills | Stainless Steel |
| Cord Retainer | Cord Snap Fastner & Strap |
| Color | Red |
| Stand Options | Integrates with Gale Force, Force 9 and Phoenix Focus Stands |

FACT
Ultimate Portability:
Lightest high performance
air mover in the Industry at
only 20.9 pounds.



Dual auxiliary power outlets with onboard 12 amp circuit breakers

Dimensions

| | |
|-----------------|-----------------------|
| Unit Weight | 20.9 pounds |
| Unit Dimensions | 21.9" x 9.8" x 22.5" |
| Box Weight | 28.2 pounds |
| Box Dimensions | 22.6" x 23.2" x 11.4" |

**Stacked
5 High**



**Stacked
4 High**



Hands Down the Best Warranty in the Industry




Protege-branded products purchased in the U.S. from authorized distributors include a 3-year limited warranty. Contact Protege to confirm warranty information about your product(s).

This limited warranty covers defects in materials and workmanship in your Protege branded products, purchased in the U.S. ONLY. Local warranty policy (if any) in your country will cover products purchased outside the U.S.


Air Mover Testing Data & Results

Total Average of Feet/Minute + CFM (128 Sq. Ft. Area)

This combination correlates to the drying performance of an air mover


| Protege AXL-3000 | Leading Low Profile AM | Leading CAM AM | Leading Small Axial AM | Leading Axial AM |
|---|---------------------------|------------------------|---------------------------|-----------------------|
| 2471 CFM | 750 CFM | 929 CFM | 761 CFM | 2220 CFM |
| <p>How the Protege AXL-3000 compares to each air mover</p>  | 230% better | 170% better | 220% better | 11% better |

In our tests, the AXL-3000 surpassed the leading low-profile air mover in velocity & CFM performance.

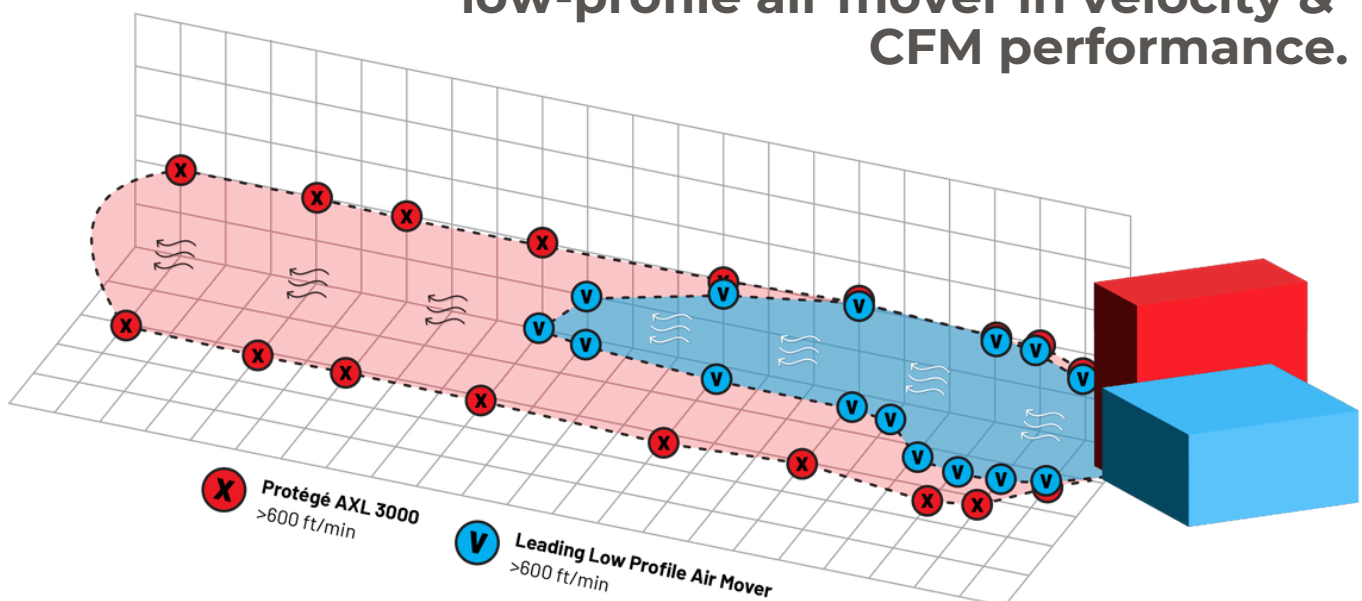

How many AXL-3000 air movers fit on a ...

Box Truck

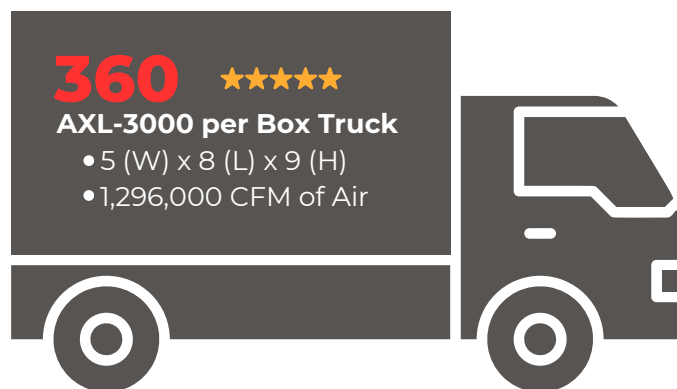

The “other guys” ...

360 Low Profile / Radial Air Mover's Per Box Truck
5 (W) x 8 (L) x 9 (H) & 333,000 CFM of Air

160 Focus Axial Air Mover's Per Box Truck
4 (W) x 8 (L) x 5 (H) & 496,000 CFM of Air

How many AXL-3000 air movers fit on a ...

Cargo Van



The “other guys” ...

168 Low Profile / Radial Air Mover's Per Cargo Van
3 (W) x 7 (L) x 8 (H) & 155,400 CFM

105 Focus Axial Air Mover's Per Cargo Van
3 (W) x 7 (L) x 5 (H) & 691,200 CFM of Air

How many AXL-3000 air movers fit on a ...

Semi-Trailer



The “other guys” ...

1,860 Low Profile / Radial Air Mover's Per Semi-Trailer
5 (W) x 31 (L) x 12 (H) & 1,720,500 CFM of Air

1,050 Focus Axial Air Mover's Per Semi-Trailer
5 (W) x 30 (L) x 7 (H) & 3,255,000 CFM of Air



AXL-3000 Air Mover

Pricing

\$359.00 per unit

State Sales Tax (if applicable) & Shipping Not Included.



Bulk Pricing & Custom Colors Available

Call our sales team for bulk pricing.

Sales Team: (317) 723-3016

ORDER ONLINE



Protege Solutions LLC

5858 Thunderbird Road
Indianapolis, Indiana 46236
sales@protegedirect.com

